

BRUCE 布鲁斯

BRUCE 布鲁斯

400-8890-100
www.chinabruce.cn



扫一扫
关注布鲁斯
官方公众号



扫一扫
关注孝心缝慈善
基金会官方公众号

B5000

超稳定电脑包缝机

Super-stable Computerized Overlock Machine



怕跳针 · 怕断线 · 就用布鲁斯
NO BREAK · NO SKIP

台州市布鲁斯缝制设备有限公司
TaiZhou Bruce Sewing Machine Co.,Ltd.

浙江省台州市椒江区东海大道东段1008号2号楼
No.2 building No.1008 Eastern Section East Sea Road Jiaojiang
District Taizhou, Zhejiang.

2023.08



车缝线头短，无需修剪

Short thread trimming, no need extra cutting

采用短线头光感技术，车缝线头长短不再依赖操作工手势也能保证在5mm以内，无需修剪。

Light sensor technology for short thread, tread tail can be within 5mm without relying on skilled workers, no need extra cutting process.



自动识别面料，过骨爬坡顺畅

Automatic recognition of fabrics, smooth climbing over multiple layers of fabrics

面料智能识别，自动检测面料厚度，过骨自动降速加力，爬坡力强，缝纫更顺畅。

Intelligent recognition of the fabric, automatic detection of the thickness of the fabric, automatic speed reduction of the multi-layer fabric, strong climbing force, and smoother sewing.

B5000

品名：超稳定电脑包缝机
Super-stable Computerized Overlock Machine




全伺服控制，操作更轻松

Full servo control, easier to operation

行业领先的伺服技术，通过伺服电机控制剪线和抬压脚，没有声音，且剪线更精准。

Industry-leading servo technology, the thread trimming and presser foot lifting are controlled by servo motor, no noise, and the thread trimming is more precisely.

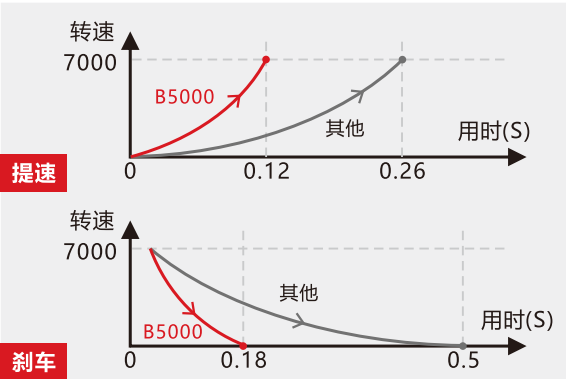


速度超快，出活多

Super fast and high efficiency

起缝到最高转速仅需0.12s，刹车到停止仅需0.18s，启停效率提升14.3%；稳定使用速度可达7000转/分。

It takes only 0.12s from start to highest speed, 0.18s from highest speed to stop, efficiency improves 14.3%. Working speed can reach 7000rpm, high efficiency, earn more money.

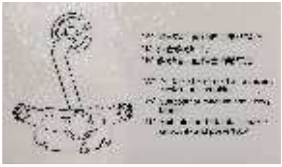

A档，薄料
A level, for ultra-thin fabric



M档，中厚料
M level, for medium and heavy fabric



H档，厚料
H level, for thick fabric

薄中厚可调，适应换季单

Adjustable fabric thickness technology, more suitable for different seasons

独家专利薄中厚三档调节，可适应薄到网纱，厚至牛仔、卫衣等皆可缝制。

Light, medium and heavy 3 levels mechanical adjustment with unique patent, suitable for sewing from guaze to denim, sweater, etc.

技术参数 Specification

													
					(mm)	(mm)	(mm)	(mm)	(mm)	(S.p.m)	(mm)		NW/GW (kg)
B5000-4-M03/333	基本缝 Plain seam	Dcx27 11#	2	4	2	2x4	0.8-4.8	0.7-2	6	7000	515X360X490	33/41	
B5000-4-M03/333/X	厚料 Heavy duty	Dcx27 11#	2	4	2	2x4	0.8-4.8	0.7-2	6	7000	515X360X490	33/41	
B5000-5-03/233	5×5	Dcx27 11#	2	5	5	5x5	0.8-3.8	0.7-2	5	7000	515X360X490	33/41	
B5000-5-03/333	3×4	Dcx27 11#	2	5	3	3x4	0.8-3.8	0.7-2	5	7000	515X360X490	33/41	
B5000-5-03/333/X	基本缝 Plain seam	Dcx27 11#	3	6	3x2	3x2x4	0.8-3.8	0.7-2	5	7000	515X360X490	33/41	

注 (Note) :

H/M: 薄厚适应性广，选配X (吸风管剪线刀)。选配SD (前后气吸装置)。

H/M: Suitable for light and heavy; optional device X: suction cube cutter (for connecting SD device) is optional, SD: start and end suction device is optional.