

BRUCE 布鲁斯

BRUCE 布鲁斯

400-8890-100  
www.chinabruce.cn



扫一扫  
关注布鲁斯  
官方公众号



扫一扫  
关注孝心缝慈善  
基金会官方公众号

# BRC- 5559F

## 侧切刀步进电脑平缝机

Stepping Control & Needle Feeding Computerized  
Lockstitch Machine



怕跳针 · 怕断线 · 就用布鲁斯  
**NO BREAK · NO SKIP**

台州市布鲁斯缝制设备有限公司  
TaiZhou Bruce Sewing Machine Co., Ltd.

浙江省台州市椒江区东海大道东段1008号2号楼  
No.2 building No.1008 Donghai Avenue East Jiaojiang District  
Taizhou City, Zhejiang Province China.



怕跳针 · 怕断线 · 就用布鲁斯  
NO BREAK · NO SKIP

# 5559F

品名：侧切刀步进电脑平缝机  
Stepping Control&Needle Feeding Computerized Lockstitch Machine




## 步进控制，针距精准

Stepper motor driving, stable and accurat

步进电机控制针距，精确到0.1mm，针距精准，且可锁定针距，线迹均匀，避免误操作导致的针距长短不一。

Stepper motor driving electric adjustable stitch length, minimum precision 0.1mm, stitch length can be locked by setting password.

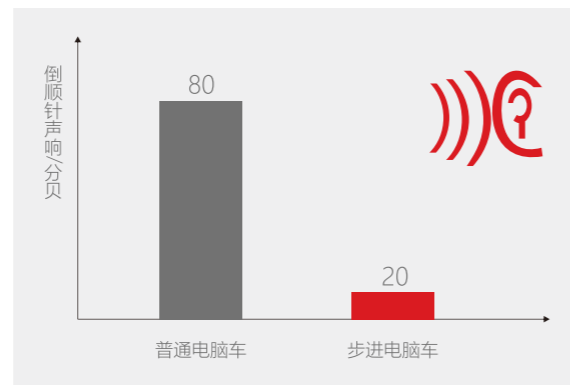


## 倒缝无声、安静舒适

Back seam is silent, quiet and comfortable

通过步进电机控制倒缝结构，实现倒缝无声，给你安静舒适的工作环境。

Stepping motor control backstitch device noiseless.

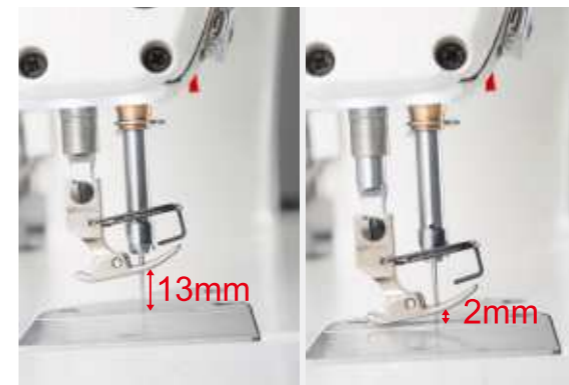


## 步进抬压脚、高度可调

Step motor control presser foot lifting, height adjustable

压脚高度在0-13mm范围内可调，薄料压脚调低，节省时间，厚料压脚调高，放料方便。

The height of the presser foot is adjustable within the range of 0-13mm, the presser foot for thin materials is lowered to save time, and the presser foot for thick materials is higher for easy feeding.

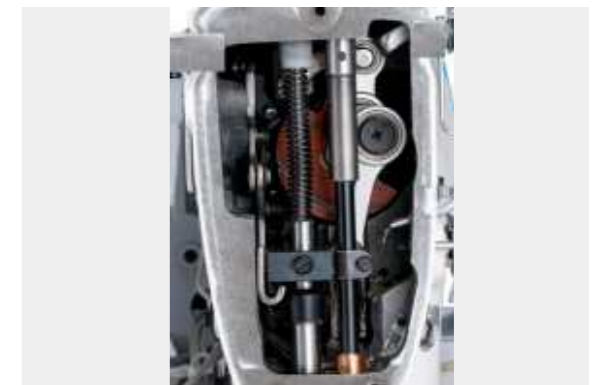

## 头部无油，清洁环保

Semi-dry, clean sewing

头部采用进口优质矿物润滑脂润滑，配以轴承式挑线杆，彻底解决油污烦恼，清洁缝纫。

Head lubricated by imported high quality mineral grease and bearing type take-up solve the oil troubles completely and keep clean sewing.



## 超大落料空间

Large dust collector space

采用26mm落料空间，边角料从落料口自然滑落，时刻保持缝台的清爽干净。

26mm dust collector space make scraps easily drop into the collector, keep the sewing plate clean all the time.



## 语音导航，一键直达

Voice guide one key to reset

标配语音导航，每个按键都有详细的语音提示，出现故障时，可语音播报，操作简便。

Standard voice guide, each button has a detailed voice guide, when a fault occurs, it can be voice broadcast, easy to operate.



切包一体(BRC-5558G-T)

One machine with fabric edge cutter and tapebinder functions

## 技术参数 Specification

机型	针	针号	针距 (mm)	线迹 (mm)	速度 (S.p.m)	头部供油	切刀针位组	尺寸 (mm)	重量 (kg)
BRC-5559F-W	DBX1	11-18#	2	5	4-9	4000	1/8、1/4	690x292x550	39.5/45.5
BRC-5558G-A	DBX1	11-18#	2	5	4-13	4000	●	645x248x550	32/38.7
BRC-5558G-A-T	DBX1	11-18#	2	5	4-13	3500		645x248x550	32/38.7